

# GPS Vehicle Tracker

## User Guide

(Version V2.1)





## At a Glance

# 1

- 1.1 Overview
- 1.2 Accessories  
Power cable/Relay
- 1.3 Wiring Diagram

### Wiring Diagram

Schematic diagram of wiring principle

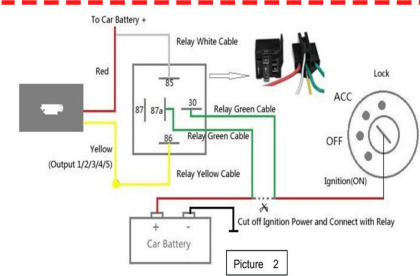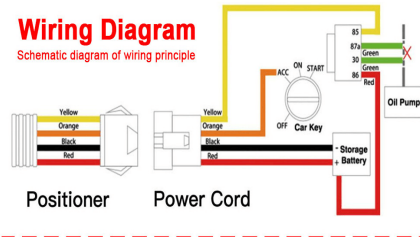

## Getting Started

# 2

### 2.1 Installing the SIM card

- Important:** 1 A SIM card is required in order to use cellular services when connecting to GSM networks.
- 2 Keep the SIM card GPRS availability
- 3 Note down the SIM card phone numbers which is device contacting numbers. Open the side plug, install the SIM card in the right direction, turn on the device.

### 2.2 Setting up and activating the device

To set up and activating the device, you should send SMS to device numbers by mobile phone.

Setting server

SMS: [SERVER.1@GW.GWGPS12580.COM](mailto:SERVER.1@GW.GWGPS12580.COM),8005,0#


Tracking server: [www.gwgps12580.com](http://www.gwgps12580.com)

APP name: CARHERE

Login: Product IMEI number with 15 digits

Default Password: 123456

- 3.3 Search for "carhere" in APP Store or Google play store to download. Or scan below QR Code to download

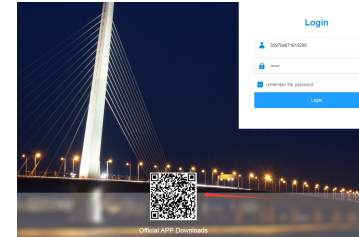

### 2.3 Installing the device

- 2.3.1 Connect according wires to your car by referring to [Wiring Diagram](#) in Chapter 1.3

### 2.3.2 Install the device in following three suggested place:

**Important:** 1 Make it covert for security factors.

2 Keep away from high power electrical devices,such as reversing radar,anti-theft device or other vehicle communication equipment which may affect the device signal.

3 Keep the device front face up&No metallic cases above the device which may affect signal as well. Such as the windshield which is pasted with metal thermal-protective coating or heating coating.

## Checking location

# 3

### 3.1 Via SMS

**WHERE#**

Ask your distributor for log-in account and password.

## Basic

# 4

### 4.1 LED indication

#### 4.1.1 Red LED -Power status

Slow flashing	Normal working (backup battery)
Solid bright	Normal working (external power supplying)
Off	Power off

#### 4.1.2 Green LED -GSM status

Quick flashing	GSM initialization
Slow flashing	Normal working with GSM network
Off	No GSM signal

#### 4.1.3 Blue LED -GPS status

Quick flashing	Searching GPS signal
Slow flashing	Normal working with GPS fixed
Off	No GPS fixed

## Alarm management

# 5

\*When any kinds of alarms happened, device will send alarm SMS&CALL SOS numbers.

### 5.1 Vibration Alarm

When ACC is off and some vibration happened, device will alarm.

### 5.2 Cut-off alarm

When external power is cut, device will alarm.

### 5.3 Geo-fence alarm

After setting geo-fence range, if the device come in&out the range, it will alarm.

### 5.4 Low-power alarm

When external power is cut, device will keep working with its backup battery and when its battery is too low, device will alarm.

### 5.5 Movement alarm

When ACC is off, if the vehicle is moved, device will alarm.

## Trouble shooting

# 6

6.1 When device in the background display not on-line or off-line., First observe the device 3 indicator is normal, according to the device lights status to judge device work condition, if the red light flashes, the green light is not bright, please check that the SIM card is installed correctly, if the installation is no problem, please replace the SIM card test again. Under no condition to observe the situation, use mobile phone dial SIM card device number, if not connect successful, indicating that the device Area is no GSM signal or signal is weak, please try it again in a good signal place; if the device is insufficient balance or out of service,Please try again after recharge; if connect successful, please consult the appropriate operator if SIM card is open GPRS function; if not connected,prompt power off ,please check that the device is installed properly.

6.2 When the GPS signal reception abnormal, please take it into the broad place positioning, general first positioning need 1-2 minutes. If a long time does not positioning, please check the device installation location if meets the requirements, the normal installation without metal shielding.

6.3 When the GSM signal reception abnormal, please check the device SIM card is installed correctly; or the location may not cover where signal coverage. GSM signal (such as a basement), please use in the place

6.4 When power-up ,the red power light is off, please check the wiring is correct, and after exclude the internal device problem then can power-up again.

## Product Parameters:

Global 4G version (also compatible with Global 2G network):

European / Middle East / African / Asian Version:

4G LTE-FDD: B1/ B3 / B5 / B7 / B8 / B20 / B28

4G LTE-TDD: B38 / B40 / B41 etc.

2G GSM: 900/1800MHz

South American / North American /New Zealand / Australia Version:

4G LTE-FDD: B1 / B2 / B3 / B4 / B5 / B7 / B8 / B28 / B66 etc.

4G LTE-TDD: B38 / B40 / B41 etc.

2G GSM: 850/900/1800/1900MHz

Network: 4G Cat1 + 2G GSM/GPRS

Dim: 63.7\*32.5\*9mm

Weight: 20g

GPS sensitivity: -159dBm

GPS accuracy: 5-10m

Working voltage range: 9V-90V

Built-in lithium battery: 90mAh